


## 7-inch GPS Chart Plotter with Built-in AIS Transponder








### Model: KP-39A



AIS targets on Plotter screen

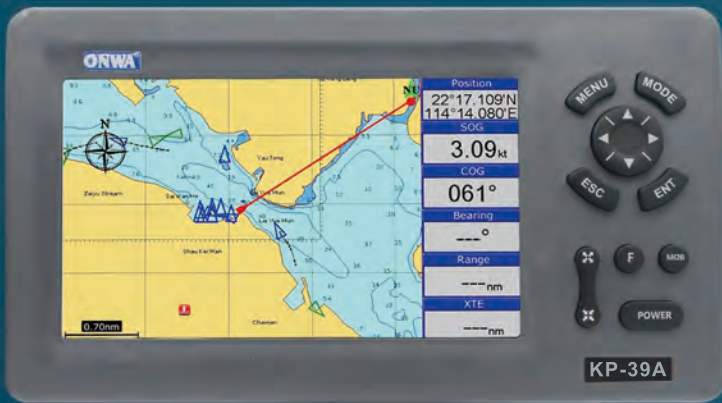

AIS targets on AIS screen

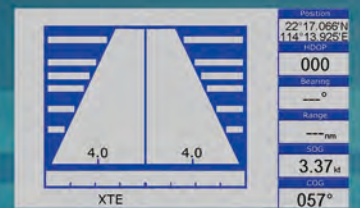

- Easy to Operate
- 7-inch high resolution (800x480 pixels) LCD
- Built-in Class B AIS Transponder
- Supports Dual Mapping System: K-Chart and C-Map
- Supports Onwa latest KChart3.0
- Ingress Protected to IPX5

## PLOTTER CHARACTERISTICS

Waypoints/icons	12000 user waypoints with name, symbol 3 system waypoints: MOB, Start, Cursor 10 proximity waypoints
Routes	Max 30 routes. And up to 170 points for each one
Tracks	8000 points automatic track log; 10 saved tracks (up to 8000 track points each) Let you retrace your path in both directions
Alarms	XTE, Anchor drag, arrival, speed, voltage, proximity waypoint and time, AIS alarm
Palette	Normal Daylight exposed to sunlight Night in dark environment NOAA paperchart colors
Tides	Tide data
Projection	Mercator projection
Position format	Degree of minutes and UTM
Basemap	Built-in ONWA K-Chart
External Map	SD Cards slot for C-Map MAX and ONWA K-Chart
User data storage	Internal backup of user settings
Plot Interval	5s to 60min 0.01nm to 10nm Automatic way
Plotting scales	0.001nm to 700nm
Nav Data	Inputs: \$--GGA, \$--GLL, \$--GSA, \$--GSV, \$--RMC, \$--VTG, \$--ZDA, \$--VWR, \$--VWT, \$--MWD, \$--VPW Outputs: GGA, GLL, RMC, AAM, APA, APB, BOD, BWC, BWR, DBT, DPT, HDT, MTW, RMB, TLL, VTG, WPL, XTE, ZDA, ZTG, ZDL, MWD, VPW, VWR, VWT Outputs for autopilot: \$--APB, \$--BOD, \$--XTE, \$--APA
Perspective View	On/off
Celestial	Sunrise/Sunset Moonrise/Moonset

## POWER SUPPLY

10.5 to 35VDC, current drain < 1.0A at 12V

## AIS INTERFACE

Data output	NMEA0183, RS232
Baud rate	38,400

## AIS CHARACTERISTICS

Transmitter x 1	
Receiver x 2	(one time shared between AIS/DSC)
Frequency	156.025 to 162.025 MHz in 25KHz steps
Output power	2 watts typical
Channel bandwidth	25KHz

Channel step	25KHz
Modulation modes	5KHz GMSK (AIS, TX AND RX) 25KHz AFSK (DSC, RX only) 25KHz AFSK (DSC, RX only)
Bit rate	9600 b/s +- 50 ppm (GMSK) 1200 b/s +- 30 ppm (FSK)
RX sensitivity	Sensitivity - 107dBm 25KHz Message error rate less than: 2% Co-channel 10dB IMD 62dB Blocking 84dB

## PHYSICAL

Size	187mm(H)X250.1mm(W)X148mm(D)
Weight	1.03kg
Display	7-inches ColorTFT day-view LCD 800X480 pixels
Input & Output Port:	One opto-isolated input Port One RS232 Output Port
Waterproofing	Display unit: IPX5 Antenna unit: IP66
Temperature range	Display unit: -5°C to +55°C

## GPS RECEIVER CHARACTERISTICS

Receiver	50 parallel channel GPS receiver continuously tracks and uses up to 50 satellites to compute and update your position
Acquisition time	Cold start: 60 seconds average
Hot start	45 second average
Update rate	1/second or 10/second (selectable), continuous
Position	2.5 meters(95%) without S/A
Velocity	0.1 meter/sec without S/A
Time	100ns synchronized to GPS time
Dynamics	Altitude: 50,000m Max
Velocity	500 m/s
Acceleration	4g Max
Datum	WGS 84 and user define

## EQUIPMENT LIST


### STANDARD

1. Display unit
2. External GPS antenna with 4m cable (SMA connector)
3. Operator manual
4. Installation materials and standard spare parts

### OPTIONAL ACCESSORIES

- Marine GPS Antenna KA-07
- Marine VHF Antenna (KA-156 or KA-162\_X) (For AIS communication)

## INTERCONNECTION DIAGRAM

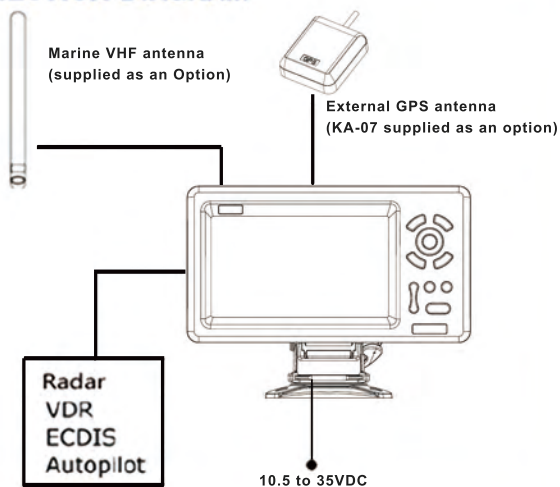

## DISPLAY UNIT

